
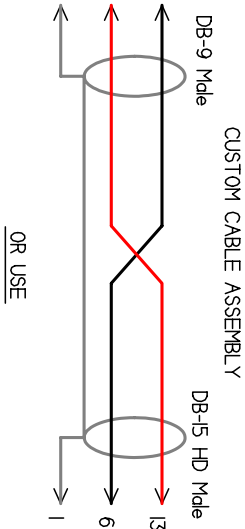



BROADCAST TOOLS SRC-8

SETTINGS:
 2400 BAUD
 HEX MODE & PAIR MODE
 NORMAL

PROCEDURE:
 JP07 N and N
 DIP SWITCH 1-3 OFF, 4-6 ON, 7-8 OFF



OR USE

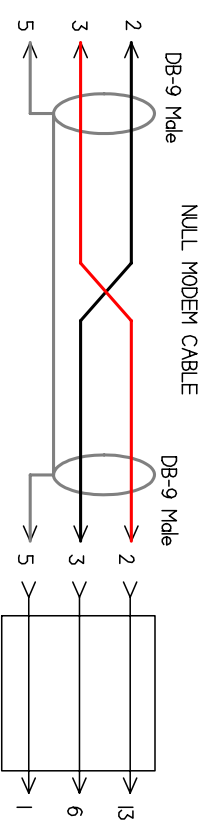

MOSELEY MUX
 SERIAL
 ADAPTER
 230-14230-01 REV A

MOSELEY SL9003T1

SETTINGS:
 BAUD - 2400
 LENGTH - 8
 PARITY - NONE

PROCEDURE:
 CONNECT TO SETUP WITH STRAIGHT SERIAL CABLE
 HYPERTERMINAL SETTINGS 57600 BAUD, 8-N-1
 SH CO Enter (Show Configuration)
 SE CA 0 Enter (Select Card 0 - Mux)
 SE 5 RA 2400 Enter (Set Port 5 to 2400 Baud)
 SE 5 PA 0 Enter (Set Port 5 Parity to None)
 SE 5 LE 8 Enter (Set Port 5 Length to 8 Bits)
 SA CO Enter (Save Configuration)

(IF USING PORT 6 SUBSTITUTE 6 FOR 5 ABOVE)

