


BURK ARC-16

MOSELEY SL9003T1

SETTINGS:
 2400 BAUD
 LENGTH - 8
 1 STOP BIT
 PARITY - ODD

(Length, Parity and Stop Bits are Fixed and cannot be changed)

PROCEDURE:
 Press and Hold MAINT and Press CLEAR
 Press MODE until Baud Rate is in Display
 Use arrows to select 2400

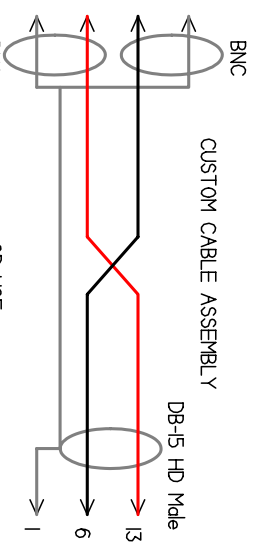

SETTINGS:
 BAUD - 2400
 LENGTH - 8
 PARITY - ODD

PROCEDURE:
 CONNECT TO SETUP WITH STRAIGHT SERIAL CABLE
 HYPERTERMINAL SETTINGS 57600 BAUD, 8-N-1

SH CO 'Enter' (Show Configuration)
 SE CA 0 'Enter' (Select Card 0 - Mux)
 SE 5 RA 2400 'Enter' (Set Port 5 to 2400 Baud)
 SE 5 PA 1 'Enter' (Set Port 5 Parity to ODD)
 SE 5 LE 8 'Enter' (Set Port 5 Length to 8 Bits)
 SA CO 'Enter' (Save Configuration)

(IF USING PORT 6 SUBSTITUTE 6 FOR 5 ABOVE)

