


BURK ARC-16

MOSELEY SL9003T1



**SETTINGS:**  
 2400 BAUD  
 LENGTH - 8  
 1 STOP BIT  
 PARITY - ODD  
 (Length, Parity and Stop Bits are Fixed and cannot be changed)

**PROCEDURE:**  
 Press and Hold MAINT and Press CLEAR  
 Press MODE until Baud Rate is in Display  
 Use arrows to select 2400

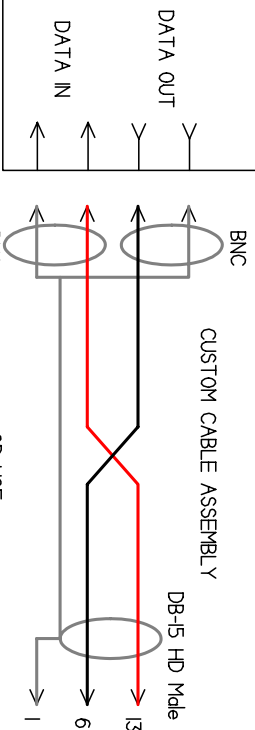

**SETTINGS:**  
 BAUD - 2400  
 LENGTH - 8  
 PARITY - ODD

**PROCEDURE:**  
 CONNECT TO SETUP WITH STRAIGHT SERIAL CABLE  
 HYPERTERMINAL SETTINGS 57600 BAUD, 8-N-1  
 SH CO 'Enter' (Show Configuration)  
 SE CA 0 'Enter' (Select Card 0 - Mux)  
 SE 5 RA 2400 'Enter' (Set Port 5 to 2400 Baud)  
 SE 5 PA 1 'Enter' (Set Port 5 Parity to ODD)  
 SE 5 LE 8 'Enter' (Set Port 5 Length to 8 Bits)  
 SA CO 'Enter' (Save Configuration)  
 (IF USING PORT 6 SUBSTITUTE 6 FOR 5 ABOVE)

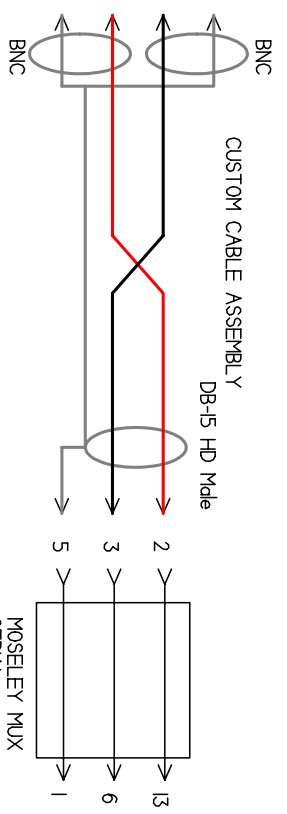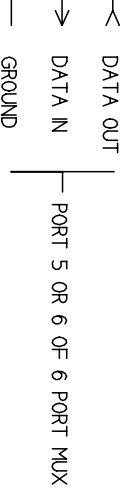

MOSELEY MUX  
 SERIAL  
 ADAPTER  
 230-14230-01 REV A